


TYPICAL 4' OFFSET




TYPICAL ABUTTING CURB

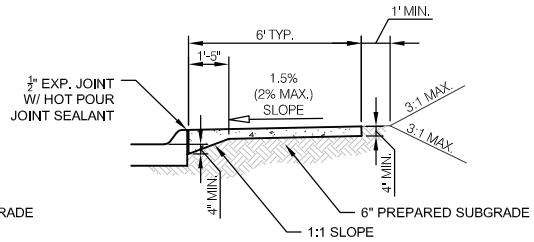

TYPICAL SIDEWALK SECTION DETAILS

NOT TO SCALE

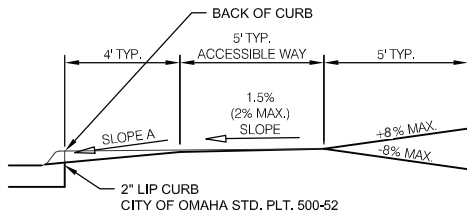

SLOPE A	
5' CURB	10.4% MAX; SLOPE, 3.75% MIN. SLOPE
6' CURB	12.5% MAX; SLOPE, 5.83% MIN. SLOPE

DRIVEWAY GRADES FOR 5' SIDEWALK W/4' SETBACK

NOTE:

1. SEE CITY OF OMAHA STD. PLT. 500-70 FOR TYPICAL 6.5' SETBACK AND 6' CURBWALK CROSS SECTIONS.
2. FOR A DRIVEWAY CONNECTIONS ASSUME SURFACE BETWEEN SIDEWALK AND TOP OF CURB IS NO MORE THAN 2% SLOPE. DEVIATION FROM THIS REQUIREMENT WILL RESULT IN AN INABILITY TO ACHIEVE THE MAXIMUM IDENTIFIED SLOPES BETWEEN THE SIDEWALK AND THE BACK OF CURB.



DRIVEWAY GRADES TYPICAL CROSS SECTION

NOT TO SCALE